

DATAPAQ® TP3 High Accuracy Data Logger – 10 and 20 Channels for Furnace Tracker®, Kiln Tracker® and Oven Tracker®

Made from a single piece of machined stainless steel, with Bluetooth® communication as standard and multiple 10 or 20 channel thermocouple types, the DATAPAQ TP3 is the toughest and smartest data logger available!

The data logger can be fuelled by three battery types housed in an interchangeable battery cassette for maximum flexibility. With 3.6 million data points for clearer process visibility, sampling speed of 10 readings per second and accuracy of $\pm 0.3^{\circ}\text{C}$ ($\pm 0.5^{\circ}\text{F}$), the DATAPAQ TP3 is the obvious choice for heat treatment, TUS surveys, ceramics and automotive processes.

Optional RF telemetry for real time monitoring, analogue inputs for reading other variables and choice of two logger styles allow the DATAPAQ TP3 to meet the most demanding specifications in the industry.



DATAPAQ TP3 data logger



DATAPAQ TP3 Furnace system



DATAPAQ TP3 Kiln system

SYSTEM VALUE

- Ten or twenty thermocouple channels for maximum data collection on each run
- Reset/download via Bluetooth with short range telemetry capability (up to 5 meters)
- High logger accuracy: $\pm 0.3^{\circ}\text{C}$ ($\pm 0.5^{\circ}\text{F}$) for compliance with tight specifications
- On-board memory service log for remote diagnostic and rapid on-site service
- Standard USB data cable available in local markets
- Radio frequency (RF) telemetry or hard wired data acquisition for monitoring in real time
- 3 user-replaceable battery types for operation in normal and high ambient temperatures
- 'Multiple events' allows variable sampling intervals during a run – ideal for water and gas quench processes
- Multiple run capability allows storing up to 10 runs before downloading into separate paqfiles
- Sampling intervals down to 0.1 seconds to collect maximum data

AMS 2750E AND CQI-9 REQUIREMENTS

- Multiple thermocouple types give flexibility for TUS and SAT
- On-board correction factors and calibration certificate – eliminate human error and save time on report generation
- Multiple software language support – 'one click', live language selection to meet operator needs
- Analogue input as optional for measuring 4 – 20 mA and 0 – 10 V signals
- Eliminate earth loop noise by using Bluetooth (as standard) instead of a cable for external logging

TECHNICAL SPECIFICATIONS

DATA LOGGER



Model number	TP3116	TP3016	TP3216	TP3126	TP3026	TP3226	TP3136	TP3036	TP3236
Temperature range	-100 °C to 1370 °C (-148 °F to 2498 °F)								
Connectivity	USB or Bluetooth* as standard								
Max. operating temperature	110 °C (230 °F)	70 °C (158 °F)		110 °C (230 °F)	70 °C (158 °F)		110 °C (230 °F)	70 °C (158 °F)	
Number of channels	10			20					
Memory capacity	3.2 million data points**			3.6 million data points**					
Sampling interval	0.1 sec – 50 min no telemetry ; 1 sec – 50 min RF telemetry*								
Logger accuracy	± 0.3 °C (0.5 °F)								
Dimensions L×W×H	200 × 98 × 20 mm (7.9 × 3.9 × 0.8 in)						177 × 124 × 20 mm (7 × 5 × 0.8 in)		
Battery	Lithium × 4	NiMH rechargeable	Alkaline × 4AA	Lithium × 4	NiMH rechargeable	Alkaline × 4AA	Lithium × 4	NiMH rechargeable	Alkaline × 4AA
Thermocouple type	K (other types available)								

* Contact DATAPAQ for availability of telemetry/Bluetooth in your country.

** Note that memory capacity may be limited by battery life restrictions.

BATTERY



Battery type	BP3000 NiMH	BP3051 Alkaline	BP3021 VHT
	Rechargeable, suitable batteries BP3001	Suitable batteries 4 x AA Alkaline BP0011	Suitable batteries Lithium thionyl BP0021
Battery life	10 channel, 1 min sample interval 70 °C (158 °F): 200 hours 20 channel, 1 min sample interval 70 °C (158 °F): 150 hours	10 channel, 1 min sample interval 70 °C (158 °F): 450 hours 20 channel, 1 min sample interval 70 °C (158 °F): 370 hours	10 channel, 1 min sample interval 100 °C (212 °F): 500 hours 20 channel, 1 min sample interval 100 °C (212 °F): 450 hours

Fluke Process Instruments

EMEA

Cambridge, UK
Tel: +44 1223 652 400
sales@flukeprocessinstruments.co.uk

Americas

Derry, NH USA
Tel: +1 603 537 2680
sales@flukeprocessinstruments.com

China

Beijing, China
Tel: +86 10 6438 4691
sales@flukeprocessinstruments.com.cn

Asia East and South

India Tel: +91 22 2920 7691
Singapore Tel: +65 6799 5596
sales.asia@flukeprocessinstruments.com

Worldwide Service

Fluke Process Instruments offers services, including repair and calibration. For more information, contact your local office.

www.flukeprocessinstruments.com

© 2016 Fluke Process Instruments
Specifications subject to change without notice.
9/2016 DS_FT_TP3, Rev. A



Food Tracker®

Thermal Barriers

Not all food processes are equal. Every process has its own unique space, temperature, duration or environmental requirements (steam, submersion in water or oil). For this reason, the Food Tracker® system includes a choice of thermal barriers. Options vary from quick flash frying where the whole system is submerged, to long duration high temperature bakery processes. All Datapaq® barriers are designed and engineered to deliver maximum performance at a minimum weight and size.

TB5009

Non-submersible / short bake / roast processes

IP Rating	IP65				
Height	60 mm (2.4 in)				
Width	204 mm (8 in)				
Length	394 mm (15.5 in)				
Weight	4.4 kg (9.7 lbs)				
Heatsink	N/A				
Temperature	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
Time (hours)	1.5	3.0	1.75	1.25	1.0

TB5010

Non-submersible / long bake / roast processes

IP Rating	IP65				
Height	100 mm (3.9 in)				
Width	219 mm (8.6 in)				
Length	393 mm (15.5 in)				
Weight	6.0 kg (13.2 lbs)				
Heatsink	TB1001 (1.0 kg / 2.2 lbs)				
Temperature	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
Time (hours)	-	10	5.5	3.75	2.5

TB5011


Non-submersible / short bake / roast processes

IP Rating	IP65				
Height	40 mm (1.6 in)				
Width	195 mm (7.7 in)				
Length	384 mm (15.1 in)				
Weight	3.0 kg (6.6 lbs)				
Heatsink	N/A				
Temperature	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
Time (minutes)	-	150	60	40	35

TB5016

Heavy duty / waterproof / ham cook / chill processes

IP Rating	IP67				
Height	120 mm (4.7 in)				
Width	206 mm (8.1 in)				
Length	401 mm (15.8 in)				
Weight	6.3 kg (13.9 lbs)				
Heatsink	TB1001 x 2 (2 x 1.0 kg / 2.2 lbs)				
Temperature	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
Time (hours)	-	17	8	5	4

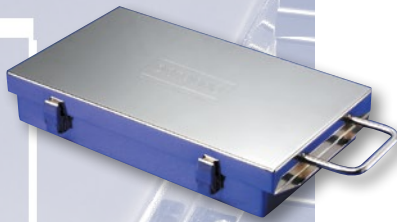

TECHNICAL SPECIFICATIONS

TB5815

Submersible / short fry / steam cook processes

IP Rating	IP67				
Height	40 mm (1.6 in)				
Width	178 mm (7 in)				
Length	398 mm (15.7 in)				
Weight	3.1 kg (6.8 lbs)				
Heatsink	N/A				
Temperature	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
Time Air (minutes)	37	120	60	45	40
Time H₂O / Oil (minutes)	-	60	30	22	20

Optional Conveyor Dive Pin TB9704A x 2, Thermocouple Finger Screw TB9763

TB5816

Submersible / long fry / steam cook processes

IP Rating	IP67				
Height	65 mm (2.6 in)				
Width	240 mm (9.4 in)				
Length	393 mm (15.5 in)				
Weight	5.3 kg (11.7 lbs)				
Heatsink	TB9707 x 2 (2 x 0.4 kg / 0.9 lbs)				
Temperature	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
Time Air (hours)	-	6.5	3.5	2.5	1.75
Time H₂O / Oil (hours)	-	3	1.5	1	0.75

Optional Conveyor Dive Pin TB9704A x 2, Thermocouple Finger Screw TB9763


TB5817

Pressure cook processes

IP Rating	IP67				
Height	105 mm (4.1 in)				
Width	150 mm (5.9 in)				
Length	360 mm (14.2 in)				
Weight	6.3 kg (13.9 lbs)				
Heatsink	TB1001 x 2 (2 x 1.0 kg / 2.2 lbs)				
Pressure	2 bar (29 psi)				
Temperature	-100°C (-148°F)	100°C (212°F)	150°C (302°F)	200°C (392°F)	250°C (482°F)
Time Air (hours)	-	14	7.5	4.5	3.5

ACCESSORIES

Barrier tray used in mesh belt applications with inclines to help transfer the equipment. Box spanner used on submersible barriers.



TB9772 – Barrier Tray
(fitted with drive pins)



TB9800 – Hanging
Hook



SCI157 – Box Spanner

Fluke Process Instruments

EMEA

Cambridge, UK
Tel: +44 1223 652 400
sales@flukeprocessinstruments.co.uk

Americas

Salem, NH USA
Tel: +1 425 446 6780
sales@flukeprocessinstruments.com

China

Beijing, China
Tel: +86 10 6438 4691
sales@flukeprocessinstruments.com.cn

Asia East and South

India Tel: +91 22 2920 7691
Singapore Tel: +65 6799 5596
sales.asia@flukeprocessinstruments.com

Worldwide Service

Fluke Process Instruments offers services, including repair and calibration. For more information, contact your local office.

www.flukeprocessinstruments.com

© 2019 Fluke Process Instruments
Specifications subject to change without notice.
01/2019 FDT Thermal barriers_DS_Rev. B2_EN